



NRC Publications Archive Archives des publications du CNRC

Habitability considerations onboard fishing vessels of the Newfoundland Fleet

Akinturk, A.; Bass, D. W.; MacKinnon, S.; Vera, J.; Cumming, D.

This publication could be one of several versions: author's original, accepted manuscript or the publisher's version. /
La version de cette publication peut être l'une des suivantes : la version prépublication de l'auteur, la version
acceptée du manuscrit ou la version de l'éditeur.

NRC Publications Record / Notice d'Archives des publications de CNRC:

<https://nrc-publications.canada.ca/eng/view/object/?id=a2f7b288-cd91-4b1e-918e-59bcecc2a382>

<https://publications-cnrc.canada.ca/fra/voir/objet/?id=a2f7b288-cd91-4b1e-918e-59bcecc2a382>

Access and use of this website and the material on it are subject to the Terms and Conditions set forth at

<https://nrc-publications.canada.ca/eng/copyright>

READ THESE TERMS AND CONDITIONS CAREFULLY BEFORE USING THIS WEBSITE.

L'accès à ce site Web et l'utilisation de son contenu sont assujettis aux conditions présentées dans le site

<https://publications-cnrc.canada.ca/fra/droits>

LISEZ CES CONDITIONS ATTENTIVEMENT AVANT D'UTILISER CE SITE WEB.

Questions? Contact the NRC Publications Archive team at

PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca. If you wish to email the authors directly, please see the first page of the publication for their contact information.

Vous avez des questions? Nous pouvons vous aider. Pour communiquer directement avec un auteur, consultez la première page de la revue dans laquelle son article a été publié afin de trouver ses coordonnées. Si vous n'arrivez pas à les repérer, communiquez avec nous à PublicationsArchive-ArchivesPublications@nrc-cnrc.gc.ca.



Habitability Considerations Onboard Fishing Vessels of the Newfoundland Fleet

A. Akinturk¹, D. Bass², S. MacKinnon³, J. Vera², and D. Cumming¹

¹*Institute for Ocean Technology, National Research Council Canada
St. John's, NL, A1B 3T5, Canada*

²*Faculty of Engineering and Applied Science, Memorial University of Newfoundland
St. John's, NL, A1B 3X5, Canada*

³*School of Human Kinetics and Recreation, Memorial University of Newfoundland and SafetyNet Research
Chair in Workplace Health and Safety, St. John's, NL, A1B 2X5, Canada*

Email: Ayhan.Akinturk@nrc-cnrc.gc.ca

ABSTRACT

Fishing vessel habitability is a growing issue of concern given the current realities that the Newfoundland fleet has to venture further offshore for more extended periods of time in order to compete for fish stocks. These issues are further complicated by the fact these vessels were not designed to accommodate the harsh ocean and environmental conditions typical of the seasonal dates regulated for harvesting. This paper looks at how such parameters as MII (Motion Induced Interruptions), postural stability vary in different vessels of the fleet. The results are based on the recently conducted sea trials of the five example vessels of the fleet and their corresponding numerical simulations using MOTSIM. MII, or other relevant parameters can be computed for different locations onboard, which might correspond to the locations of different harvesting or operational activities, for given sea conditions. The paper presents results for motion levels as well as human factors related parameters for the vessels used in these sea trials. The lengths of the vessels are 10.7, 13.7, 19.8 and 24.9m, which approximately cover all sizes included in the fleet.

Keywords: crew comfort, MII, fishing vessels

NOMENCLATURE

- D_i Displacements ($i = 1 \dots 3$, in x , y and z directions respectively)
.. As superscript indicated double derivative

Fr	Froude number
L_{OA}	Length over all
$S_{S,P}$	Sliding estimator for starboard and port
$T_{a,f}$	Tipping estimators for aft and forward
$T_{S,P}$	Tipping estimators for starboard and port
d	See Figure 3
f	Frequency
g	Gravitational acceleration
h	See Figure 3
l	See Figure 3
η_i	Motions ($i = 1 \dots 6$): surge, sway, heave, roll, pitch, and yaw
μ_s	Static friction coefficient

1. INTRODUCTION

This study is a part of a greater initiative called SafetyNet [1]. It aims at the understanding and mitigating the health and safety risks associated with employment in a marine environment. Serving to this objective, this study focuses on assessing the physical stress levels associated with the vessel motions on board fishing vessels of the Newfoundland Fishing Fleet.

With nearly doubled rates of reported injuries and fatalities over the past decades, fishing continues to be a very dangerous occupation in Newfoundland and Labrador. These trends affect the sustainability of the fishery, increase the cost of health care, and strain the available search and rescue resources. In order to achieve the objective, a numerical tool MOTSIM [2] has been developed and has been validated through sea trials and model tests under this study. This tool

will enable accurate predictions of motions of fishing vessels, thus the motion related parameters to assess physical/motion stress levels such as MII's and other postural stability indices [3] to [6]. The final objective is to develop means to reduce critical motions of fishing vessels, hence, improve the working conditions on board.

This paper focuses on the different postural stability related parameters. Sample results are shown to map the postural stability indices to the motion profiles for representative vessels of the fleet.

2. SEA TRIALS

Five vessels from the auxiliary fleet of the Canadian Coast Guard were used in these sea trials. The vessels selected varied in size to cover the range of sizes in the Newfoundland fishing fleet. Two of them had anti roll devices installed on board. Table 1 gives brief descriptions of these vessels. Vessels A, B, C1 and C2 in the table are fishing vessels operating on the coastal areas of Newfoundland. Vessel D, on the other hand, is an inshore fisheries research vessel operated by the Canadian Coast Guard [7].

During the trials, each vessel was loaded up to what might be considered "normal working" load conditions. The trials were conducted in nominally 165 m depth of water approximately 10 nm due east of St. John's. The tests followed the ITTC standard run pattern. The target sea conditions would typically range from sea state 2 to 3, with significant wave heights varying from 1 to 2.5m. During the course of each trial, sea conditions would tend to change. Two such changes are given in Figures 1 and 2 for Vessels A and C1 respectively. During the trials of Vessel A, the wave buoy broke down after approximately 10am. Therefore, sea conditions needed to be predicted for the remainder of the day (marked Linear in the legend in Figure 1).

A more detailed description of the vessels and the instrumentation used in their trials is given in [7] through [14].

3. HABITABILITY CONSIDERATIONS

In this study, to assess the habitability on board of fishing vessels two ship motions related parameters

will be used: MII [3] and postural stability criteria [15].

3.1 MII's

A motion induced interruption is defined as an incident, caused by ship motions, forcing a person on board either to lose his/her balance or abandon the task s/he is performing to respond to the motions effects. It can manifest itself in three different ways: loss of postural stability, sliding and lift-off. The loss of one's balance is the most frequent type reported. A more comprehensive discussion on the subject can be found in the references from [4] to [6]. In MOTSIM [2], a numerical simulation tool for ship motions, which is under development in this study, MII has been implemented based on the models in the above references. In this model, the human body is treated as a rigid body. It will lose its balance when the tipping moment T exceeds the righting moment provided by the body (see Figure 3). In the figure, the ratio of h/l is called the tipping coefficient. The following equations are given for a person facing aft with roll starboard down and pitch bow down (after Baitis, in [3]).

Slides

$$S_S = (\ddot{D}_2 + g \eta_4) - \mu_S g, \quad S_S > \mu_S g$$

$$S_P = (-\ddot{D}_2 - g \eta_4) - \mu_S g, \quad S_P > \mu_S g$$

Tips

Lateral Tipping

$$T_S = \left(-\frac{1}{3} h \ddot{\eta}_4 + \ddot{D}_2 + g \eta_4\right) - \frac{l}{h} \ddot{D}_3, \quad T_S > \frac{l}{h} g$$

$$T_P = \left(\frac{1}{3} h \ddot{\eta}_4 - \ddot{D}_2 - g \eta_4\right) - \frac{l}{h} \ddot{D}_3, \quad T_P > \frac{l}{h} g$$

Longitudinal Tipping

$$T_a = \left(\ddot{D}_1 + \frac{1}{3} h \ddot{\eta}_5\right) - \frac{d}{h} \ddot{D}_3, \quad T_a > \frac{d}{h} g$$

$$T_f = \left(\ddot{D}_1 - \frac{1}{3} h \ddot{\eta}_5\right) - \frac{d}{h} \ddot{D}_3, \quad T_f > \frac{d}{h} g$$

Table 1 Vessel Descriptions

Vessel	Name	L_{OA} , m	Beam, m	Draft, m	Displacement, t	Notes
A	CCGA Atlantic Swell	10.64	4.27	1.52	16.87	Fiberglass, no anti-roll device
B	CCGA Nautical Twilight	13.69	7.01	3.05	78	Fiberglass, no anti-roll device
C1	CCGA Robert Sisters II	19.79	7.01	3.81	246	Fiberglass, anti roll tanks
C2	CCGA Miss Jacqueline IV	19.80	7.32	3.05	205	Steel hull, paravanes
D	CCGS Shamook	24.89	6.55	3.21	198.6	Steel, no anti roll device

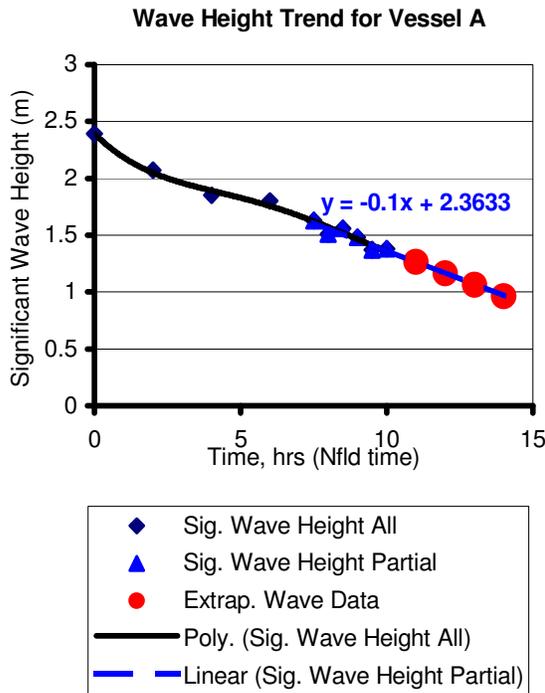


Figure 1 Variation of the significant wave height during the sea trials of Vessel A [8].

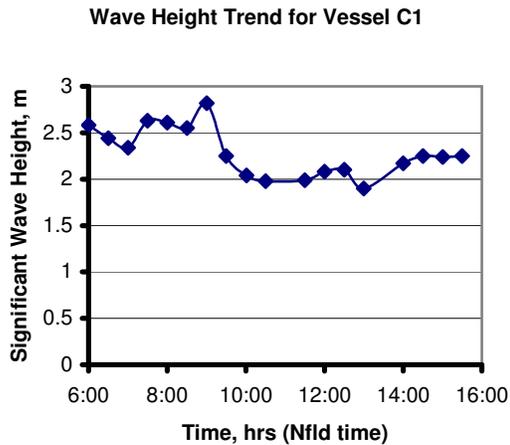


Figure 2 Variation of the significant wave height during the sea trials of Vessel C1 [12].

3.2 Postural Stability Criteria

In a parallel study, Japanese researchers developed a postural stability criterion applicable to fishing vessels [15]. Based on the experiments on their research ship, they established a relationship between

ship motions and the ability that a crewmember can maintain his/her balance. They suggested a threshold value as follows:

$$t = M_{IX} + 0.1659 M_{IY} + 0.1133 M_{IZ} < 0.22 \quad \text{Eqn. 1}$$

Where M_1 is the first moment of a ship acceleration spectrum, the second subscript is the direction, e.g. x, y and z.

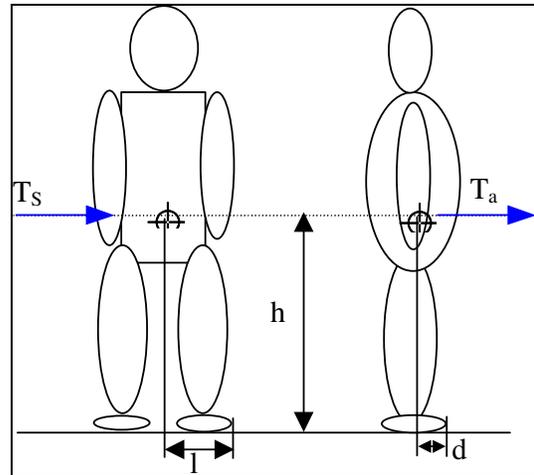


Figure 3 Model for slides and tips for a person on deck (after Baitis, in [3])

4. RESULTS AND DISCUSSION

Using MOTSIM, MII values were computed for different locations on board of Vessel A, CCGA Atlantic Swell. The locations are shown in Figure 4. The computed MII values for this vessel, based on the JONSWAP Wave Spectra with 2m significant wave height and 6.3s modal period, at $Fr = 0.2$ are given in Figure 5. It is suggested that MII values greater than 1.5 indicate a serious risk location in terms of motion induced interruptions. Location 3 in this case, appears to be a serious risk area based on the above criteria. The least risk location to work on board is in the neighborhood of amid ship followed by the stern area. It is interesting to note that for the lower ship speed, following seas are the most favorable in terms of MII values. However, for overall safety, vessel's stability should also be taken into consideration simultaneously, i.e. dynamic loss of stability in following seas. Head or bow seas proved to be the worst heading for crewmembers to work on all of the locations considered.

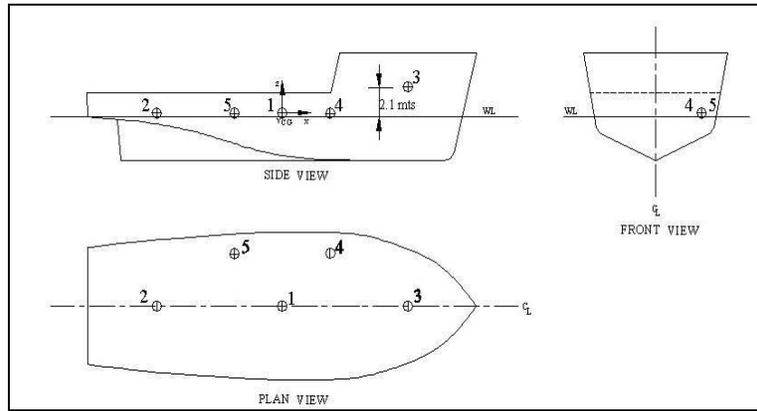


Figure 4 Locations on board Vessel A for MII computations

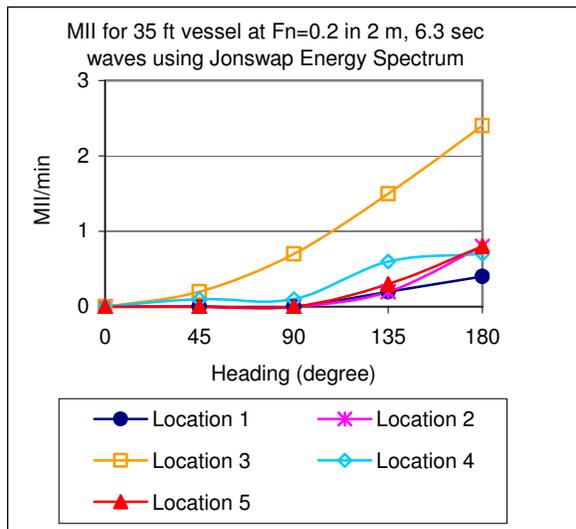


Figure 5 MII per minute computed for Vessel A at $Fr = 0.2$, based on the JONSWAP Wave Spectrum with 2m significant wave height and 6.3s modal period.

The following figures are given for the t values, Eqn 1 above. The orientation of the crewmember was the same as the one assumed in MII calculations, i.e. crewmember facing aft.

Figures 6 and 7 show the t values for Vessels A and C1 respectively. Recall that $t > 0.22$ (Eqn. 1 above) is serious risk region for one's losing his/her balance. Also note that the motion data used in computing t values for these figures are what were measured during the sea trials. Significant wave height values for these trials are given in Figures 1 and 2. Therefore, there are some differences in the sea conditions for different headings indicated in the figures even for the same vessel. Nevertheless, the sea conditions are assumed to

be “close to normal” working conditions for these vessels. Hence, the figures depict a picture in terms of postural stability index t . In both figures, it is clear that working on Location 1, which is in the vicinity of the nominal center of gravity of the vessel, is preferable, i.e. much less risk. In Figure 1, it seems data point for following seas is contradictory to MII comparisons discussed above. There may be few reasons for this: firstly, as reported in [6] and [8], determining the accurate heading during the trials has proven to be a rather difficult task. The terminology ‘following sea’ probably does not make a great deal of sense in a complex multidirectional sea where a small vessel may respond more to a less dominant directional component of the seaway. Secondly the calculations of MII were based on a unidirectional sea. Thirdly, the motion data show very large yaw angles, i.e. poor course keeping during the runs, which may have been resulted in higher t values.

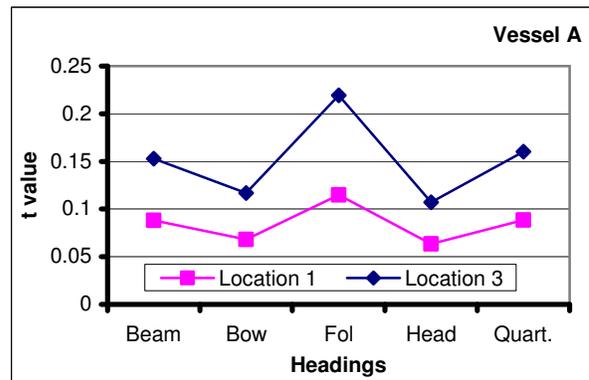


Figure 6 t values for Vessel A at $Fr = 0.2$ (trawling speed) for Locations 1 and 3 given in Figure 4 (crew member facing aft).

5. CONCLUSIONS

In this paper, some of the results of study to assess habitability conditions on board fishing vessels of the Newfoundland and Labrador fleet are presented.

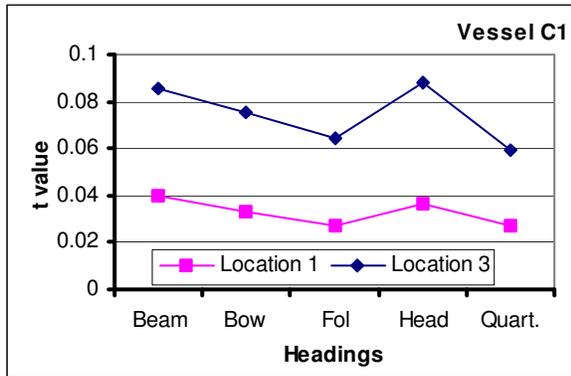


Figure 7 t values for Vessel C1 at $Fr = 0.18$ (trawling speed) for Locations 1 and 3 given in Figure 4 (crew member facing aft).

Two parameters used for this purpose: motion induced interruptions and t value (postural stability index). Although further analysis is underway, present results indicated that:

- The two parameters selected to assess habitability show agreement with each other in general terms, i.e. implied (qualitative) risks of losing postural stability are the same.
- The same location on board appears to be the highest risk area, i.e. Location 3, among the locations considered.
- There is some discrepancy between the two parameters in assessing the worst heading. However, this may very well be due to the failure to accurately assessing the heading during the trials and the differences in the sea conditions for which they were calculated.

For further study, the analysis needs to be extended other vessels of the sea trials. Perhaps, in order to better compare the results of the two parameters, MOTSIM can be used to compute the both MII's and t values. This would shed a light on effectiveness of these parameters in assessing the habitability.

ACKNOWLEDGEMENTS

This project is collaborative project between Memorial University of Newfoundland, National Research Council of Canada – Institute for Ocean Technology, and Canadian Coast Guard. The authors would like to thank the crew of the all the fishing vessels used in the sea trials, for their enthusiastic and professional

support, the CCG for the loan of survival equipment and permission to use their berth facility at the Coast Guard Base (St. John's), Jack Foley of MUN Oceanography for assistance designing the wave buoy mooring and deploying the wave buoy, Mr. Reg Fitzgerald of Oceans Ltd. for their wave buoy support and IOT technical staff for their efforts throughout the planning and execution of the trial. Support from Oceanic Consulting Corporation for transport support and the Offshore Safety and Survival Centre (OSSC) for Marine Emergency Duty (MED) survival training for IOT staff was much appreciated. Funding support from the Search & Rescue (SAR) New Initiatives Fund (NIF) and the Canadian Institutes of Health and Research (CIHR) is gratefully acknowledged.

REFERENCES

- [1] "SafetyNet – a Community Research Alliance on Health and Safety in Marine and Coastal Work", www.SafetyNet.MUN.ca, September 2003.
- [2] Pawlowski, J.S. and D.W. Bass, "A Theoretical and Numerical Study of Ship Motions in Heavy Seas", SNAME Trans., Vol. 99, 1991, pp. 319-352.
- [3] Stevens, S.C., Parsons, M.G., "Effects of Motion at Sea on Crew Performance: A Survey", SNAME Publication Marine Technology, Vol. 39, No. 1, January 2002, pp. 29 – 47.
- [4] Boccadamo, G., Cassella, P., Scamardella, A., "Stability, Operability and Working Conditions Onboard Fishing Vessels", 7th International Conference on Stability of Ships and Ocean Vehicles, Launceston, Tasmania, Australia, February 7-11, 2000.
- [5] Crossland, P., Rich, K.J.N.C., "A Method for Deriving MII Criteria", Conference on Human Factors in Ship Design and Operation, London, UK, September 27 – 29, 2000.
- [6] Graham, R., "Motion-Induced Interruptions as Ship Operability Criteria", Naval Engineers Journal, March 1990.
- [7] Cumming, D., and Fleming, T. "Practical Considerations Related to Carrying out Seakeeping Trials on Small Fishing Vessels". In the Proceedings of the 7th Canadian Marine Hydromechanics and Structures Conference, Halifax, September 21-22, 2005 (in CD), to be published.
- [8] Barrett, J., D. Cumming, and D. Hopkins, "Description of Seakeeping Trials Carried Out on CCGA Atlantic Swell – October 2003", IOT Trials Report TR-2003-28, December 2003.

- [9] Cumming, D., Hopkins, D., and Barrett, J. "Description of Seakeeping Trial Carried Out on CCGS Shamook - December 2003" IOT Trials Report TR-2004-1, December 2004.
- [10] Fleming, T. and D. Cumming, "Description of Seakeeping Trial Carried Out on CCGA Nautical Twilight – November 1, 2004", IOT Trials Report TR-2004-13, December 2004.
- [11] Cumming, D. and T. Fleming, "Description of Seakeeping Trial Carried Out on CCGA Miss Jacqueline IV – October 2004", IOT Trials Report TR-2004-15, December 2004.
- [12] Cumming, D. and T. Fleming, "Description of Seakeeping Trial Carried Out on CCGA Robert Sisters II – November 2004", IOT Trials Report TR-2005-09, December 2005.
- [13] Janes, G. and D. Cumming, "Fishing Vessel Sea Trial Stand-Alone Data Logging System", IOT Lab Memo LM-2003-27, September 2003.
- [14] Sentry Wave Buoy Operation Manual, Neptune Sciences, Inc., Slidell, Louisiana, USA.
- [15] Kimura, N., Amagi, K. and Inaba, Y. 1988. "On the Relationship between the Maintenance of Human Posture and The Ship Oscillatory Motions." In Proceedings World Symposium on Fishing Gear and Fishing Vessel Design. Marine Institute, St. John's, Newfoundland, Canada, pp564-568.